


## 白物家電


### エアコン熱交換器用

#### ACH-18/40/42/45/60

ACH-18



ACH-40/42/45/60



#### ACH-18

- 抵抗値 .....  $R_{25}=15k\Omega \pm 2\%$
- B定数 (3H) .....  $B_{25/50}=3450K \pm 2\%$   
 $B_{25/85}=3486K$
- 使用温度範囲 .....  $-30^{\circ}C \sim +100^{\circ}C$
- 熱時定数 (水中) ..... 5sec.

#### ACH-40/42/45/60

- 抵抗値 .....  $R_{25}=10k\Omega \pm 3\%$
- B定数 (3T) .....  $B_{25/50}=3950K \pm 2\%$   
 $B_{25/85}=3989K$
- 使用温度範囲 .....  $-30^{\circ}C \sim +100^{\circ}C$
- 熱時定数 (水中) ..... ACH-40,42 : 4.5sec.  
ACH-45 : 5sec.  
ACH-60 : 10sec.

#### ■特長


- 耐湿性に優れている
- 小型で熱応答が速い

※R-Tデータに関しては、弊社ホームページに記載しておりますので参照願います。  
※サーミスタセンサの使用環境条件については、弊社にご相談下さい。


## Home Appliance

### For Heat Exchanger of Air conditioner

#### ACH-18



#### ACH-40/42/45/60

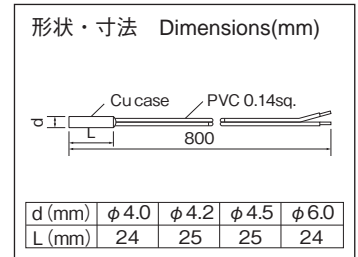

- Resistance .....  $R_{25}=15k\Omega \pm 2\%$
- B value (3H) .....  $B_{25/50}=3450K \pm 2\%$   
 $B_{25/85}=3486K$
- Operating temperature range .....  $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in water) ..... 5sec.

- Resistance .....  $R_{25}=10k\Omega \pm 3\%$
- B value (3T) .....  $B_{25/50}=3950K \pm 2\%$   
 $B_{25/85}=3989K$
- Operating temperature range .....  $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in water) ..... ACH-40,42 : 4.5sec.  
ACH-45 : 5sec.  
ACH-60 : 10sec.

#### ■Features

- Moisture resistant.
- Small with quick temperature response.

※Regarding R-T data, please refer to our web site.  
※Please consult us regarding the operating conditions of Thermistor sensors.