

# 热敏传感器


# THERMISTOR SENSORS



## 白色家电

用于电冰箱

RFG-70

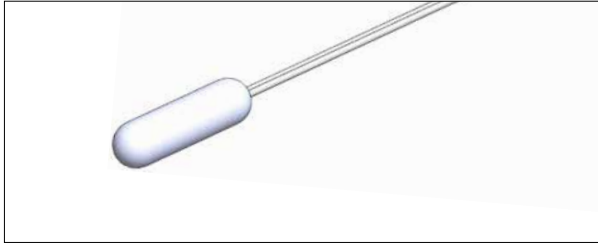

- 电阻值·····  $R_0=6.4k\Omega \pm 3\%$
- B 值 (3T) ······  $B_{0/25}=3844K \pm 2\%$   
 $B_{-20/0}=3840K$
- 使用温度范围·····  $-40^{\circ}C \sim +80^{\circ}C$
- 热响应时间常数 (水中)····· 25sec.

### ■特点

- 吸湿率小、耐绝缘性、热冲击性优异
- 精度高、可靠性高 (耐迁移性、热冲击性等)
- 可在冷藏室、冷冻室使用


※ 关于 R-T 数据, 请参阅本公司网站。  
※ 有关热敏温度传感器的使用环境条件, 请与本公司协商。

## Home Appliance

For Refrigerator



RFG-70

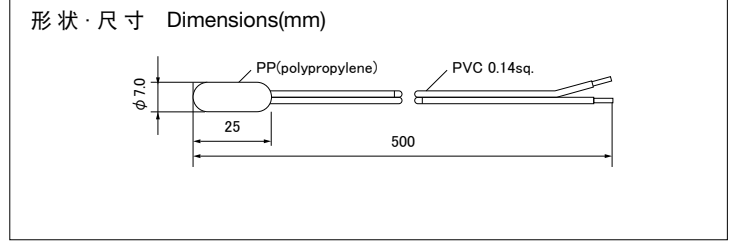

- Resistance ······  $R_0=6.4k\Omega \pm 3\%$
- B value (3T) ······  $B_{0/25}=3844K \pm 2\%$   
 $B_{-20/0}=3840K$
- Operating temperature range ······  $-40^{\circ}C \sim +80^{\circ}C$
- Thermal time constant (in water) ··· 25sec.

### ■Features

- Low water absorption rate, superior electrical insulation and thermal shock resistance.
- High accuracy and high reliability (Anti-migration, Thermal shock)
- For refrigerator compartment or freezer compartment

※Regarding R-T data, please refer to our web site.  
※Please consult us regarding the operating conditions of Thermistor sensors.