

热敏传感器


THERMISTOR SENSORS



白色家电

用于空调气温


ACA-30

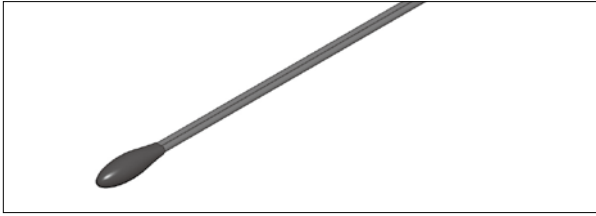

ACA-30

- 电阻值 $R_{25}=5k\Omega \pm 3\%$
- B值(3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- 使用温度范围 $-30^{\circ}C \sim +100^{\circ}C$
- 热响应时间常数(空气中) 25sec.

ACA-35

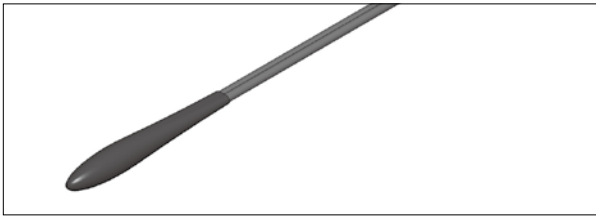

ACA-35

- 电阻值 $R_{25}=15k\Omega \pm 3\%$
- B值(3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- 使用温度范围 $-30^{\circ}C \sim +100^{\circ}C$
- 热响应时间常数(空气中) 50sec.

■特点


- 防湿性能优异。
- 小型、温度响应快。

※关于R-T数据, 请参阅本公司网站。
※有关热敏温度传感器的使用环境条件, 请与本公司协商。

Home Appliance


For Air Temp of Air conditioner

ACA-30

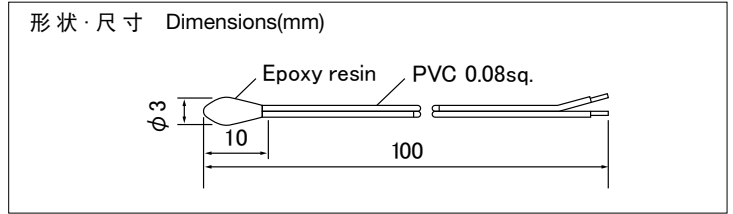

- Resistance $R_{25}=5k\Omega \pm 3\%$
- B value (3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- Operating temperature range $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in air) 25sec.

ACA-35

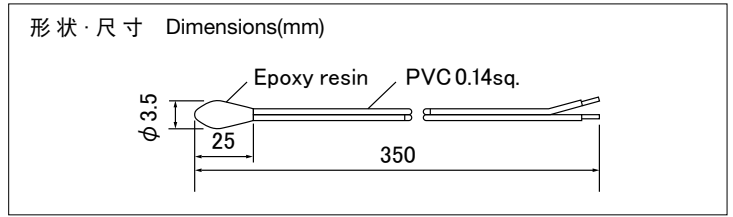

- Resistance $R_{25}=15k\Omega \pm 3\%$
- B value (3T) $B_{25/50}=3950K \pm 2\%$
 $B_{25/85}=3989K$
- Operating temperature range $-30^{\circ}C \sim +100^{\circ}C$
- Thermal time constant (in air) 50sec.

■Features

- Moisture resistant.
- Small with quick temperature response.

※Regarding R-T data, please refer to our web site.
※Please consult us regarding the operating conditions of Thermistor sensors.